


BELT NUMBERING SYSTEM

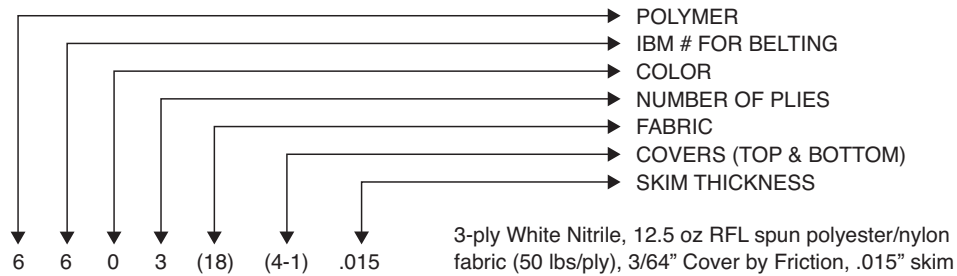

POLYMER

- | | |
|-------------------|------------------|
| 1) SBR | 5) Butyl or EPDM |
| 2) Neoprene | 6) Nitrile |
| 3) Natural Rubber | 8) Silicone |
| 4) Polyolefin | |

COLORS

- | | | | |
|-----------|-------------|-------------------|---------------------|
| 0 - White | 7 - Red | 20 - Burnt Orange | 31 - Orange |
| 1 - Black | 8 - Natural | 21 - Gray | 32 - Yellow |
| 2 - Amber | 9 - Green | 24 - Blue Green | 44 - Mid Ocean Blue |
| 3 - Brown | 14 - Green | 25 - Burgundy | |
| 5 - Tan | 18 - Blue | 30 - Dark Brown | |

FABRICS

- 8 - 33 oz rated cotton duck - 30 lbs/ply
- 13 - 11.5 oz spun polyester/mono fill - RFL NBR (red) - 50 lbs/ply
- 15 - 11.3 oz spun polyester - RFL NBR (black) - 50 lbs/ply
- 16 - 11.3 oz spun polyester - RFL NBR (red) - 50 lbs/ply
- 18 - 12.5 oz spun polyester/nylon - RFL NBR (red) - 50 lbs/ply
- 19 - 12.5 oz spun polyester/nylon - RFL SBR (red) - 50 lbs/ply
- 21 - 12.5 oz spun polyester/nylon - RFL NBR (black) - 50 lbs/ply
- 23 - 24.1 oz cotton duck - 25 lbs/ply
- 24 - 11.5 oz filament polyester - RFL SBR (red) - 75 lbs/ply
- 30 - 9.0 oz spun polyester - RFL NBR (red) - 35 lbs/ply
- 34 - 18.8 oz rated cotton/polyester - 30 lbs/ply
- 35 - 10.0 oz monofilament polyester - 48 lbs/ply
- 37 - 10.4 oz spun polyester
- 44 - 12.5 oz filament polyester - RFL Neoprene (red) - 50 lbs/ply
- 46 - 18.0 oz cotton duck - 20 lbs/ply
- 60 - 8.3 oz spun polyester - 30 lbs/ply
- 67 - Standard ZipLink - 150 lbs/ply
- 72 - 11 oz monofilament polyester (carbon fiber yarns) - 60 lbs/ply
- 76 - 11 oz monofilament polyester - RFL SBR (black) - 35 lbs/ply
- 77 - 11 oz quiet weave monofilament polyester - RFL SBR (black) - 35 lbs/ply
- 78 - 12 oz cotton/polyester blend - 16 lbs/ply
- 79 - 10.6 oz spun polyester - 45 lbs/ply
- 81 - 8.1 oz cotton/polyester blend - 10 lbs/ply
- 88 - 16.5 oz spun polyester - 35 lbs/ply
- 204 - 17.8 oz filament polyester - RFL SBR (red) - 110 lbs/ply
- 207ST - Standard ZipLink with fabric stuffers - 150 lbs/ply
- 209 - 16.0 oz filament polyester - RFL NBR (red) - 75 lbs/ply
- 210 - Smaller flexible ZipLink - 150 lbs/ply
- 218 - 16.9 oz filament polyester - RFL NBR (red) - 80 lbs/ply
- 219 - 16.9 oz filament polyester - RFL NBR (red/white) - 80 lbs/ply

COVER SURFACES (TOP & BOTTOM)

- 0 - Bare
- 1 - Friction
- 1S - Friction (silicone)
- 2 - .005"
- 3 - .032" (1/32")
- 3S - .032" (1/32") (silicone)
- 4 - .047" (3/64")
- 4B - .040"
- 5 - .060" light fabric impression (roll covering)
- 5S - .030" light fabric impression (silicone)
- 6S - .030" pebbletop impression (silicone)
- 9 - .063" (1/16")
- 10 - .047" pebbletop
- 14 - .016" (1/64")
- 17 - .125" (1/8")
- 18 - .010"
- 18F - .010" light fabric impression
- 21 - .002" white Teflon film
- 24 - .015"
- 33 - .020"
- 34 - .012"
- 37A - Roughtop impression
- 37LX - XNBR 'Blend' Roughtop impression
- 37X - XNBR Roughtop impression
- 44 - Chemglide (bare fabric)
- 46 - Pyramidtop impression
- 52 - Diamondtop impression
- 52SP - Siped Diamondtop impression
- 55 - Longitudinal Rib impression
- 57 - .047" Neatgrip impression
- 60 - .031" Neatgrip impression
- 65 - .020" Neatgrip impression
- 68 - Chemclimb impression
- 69 - Meatecleat impression
- 71 - Chemridge impression
- 72A - NBR Sandpaper impression (roll covering)
- 72X - XNBR Sandpaper impression (roll covering)
- 73 - Roughtop (roll covering)

NOTE: Estimated fabric modulus at 2% elongation